

# AT 510 ALUMINIUM-FRONT DOOR



## CHARACTERISTICS



**Thermal insulation** (in  $\text{W/m}^2\text{K}$ )  
 $U_D$  up to 0,95



**Sound reduction** (in dB)  
up to 38



**Security**  
up to RC2





**Locking**  
Multi-locking



**Profile depth** (in mm)  
93

**I-tec Open**

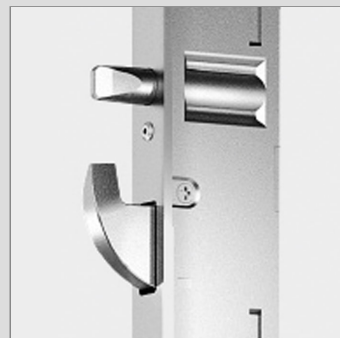


The square edge design with a flush door sash on the outside and profiled design on the inside define this entrance door. As an alternative to the conventional foamed panel structure, this system includes an insulating glass core and offering maximum climatic stability.


ALUMINIUM-FRONT DOOR  
**AT 510**

**Cuts**

Schnitt unten / Section - bottom

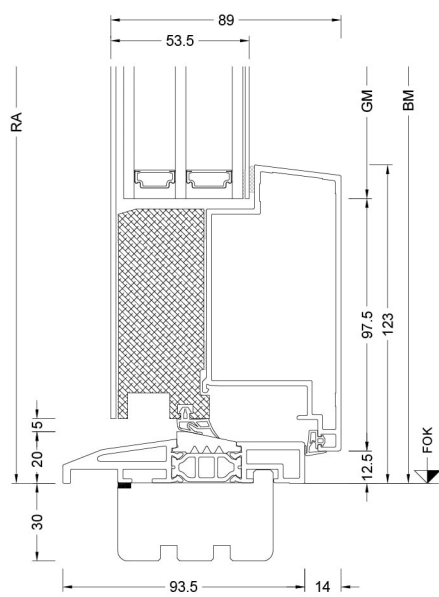

Schnitt seitlich, oben / Section - side top

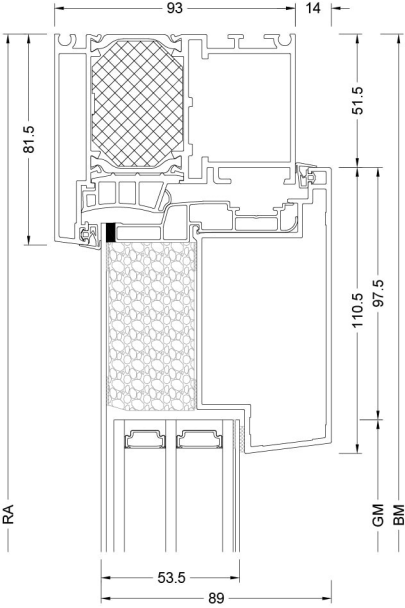

- BM Bestellmaß / Ordering size
- FOK Fußbodenoberkante / Finished floor level
- GM Glasmaß / Glass size
- RA Rahmenaußenmaß / Outside frame size
- TM Teilungsmaß / Division size