

AT 530 ALUMINIUM-FRONT DOOR



CHARACTERISTICS



Thermal insulation (in W/m²K)
U_D up to 0,69



Sound reduction (in dB)
up to 34



Security
up to RC2






Locking
Multi-locking



Profile depth (in mm)
93


I-tec Open




The design of the entire door sash is flush with a square edge towards the frame both inside and outside. 3-chamber frame profile with insulating foam core provides maximum thermal insulation. A wide range of options and customised designs are available. Standard 5-point locking provides maximum security.

Cuts

Schnitt unten / Section - bottom

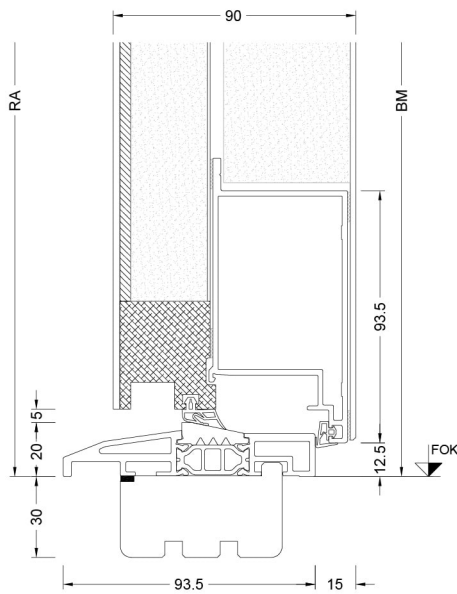

Schnitt seitlich, oben / Section - side top

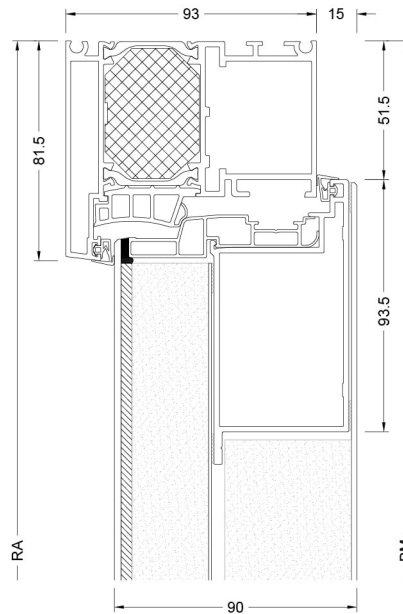

BM	Bestellmaß / Ordering size
FOK	Fußbodenoberkante / Finished floor level
GM	Glasmaß / Glass size
RA	Rahmenaußenmaß / Outside frame size
TM	Teilungsmaß / Division size