

AT 525 ALUMINIUM-FRONT DOOR



CHARACTERISTICS



Thermal insulation (in W/m²K)
U_D up to 0,87



Sound reduction (in dB)
up to 30



Security
up to RC2






Locking
Multi-locking



Profile depth (in mm)
93


I-tec Open

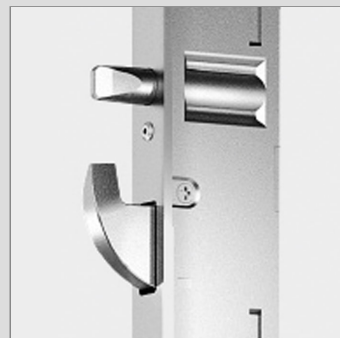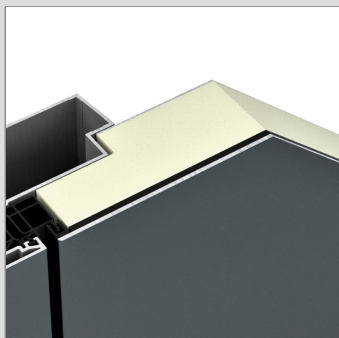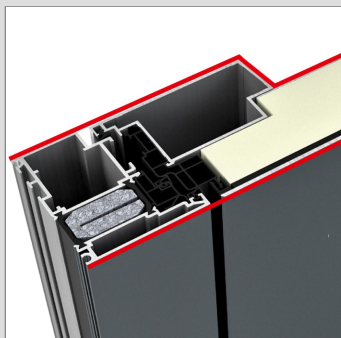


This new entrance door features a flush design on the outside and a square edged design on the inside. The insulating foam core ensures excellent climatic stability. Easy care and cleaning thanks to smoothed sash rebate. Standard 5-point locking provides maximum security.

Cuts

Schnitt unten / Section - bottom

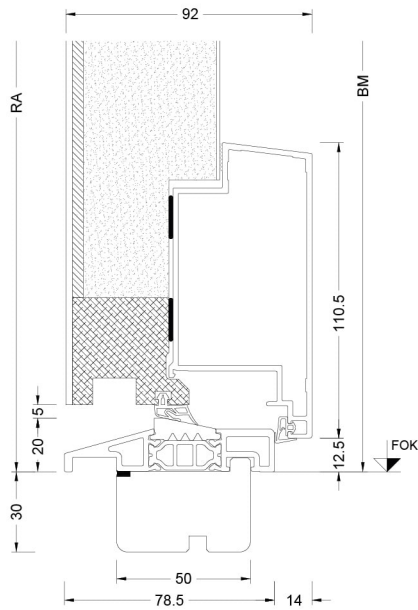

Schnitt seitlich, oben / Section - side top

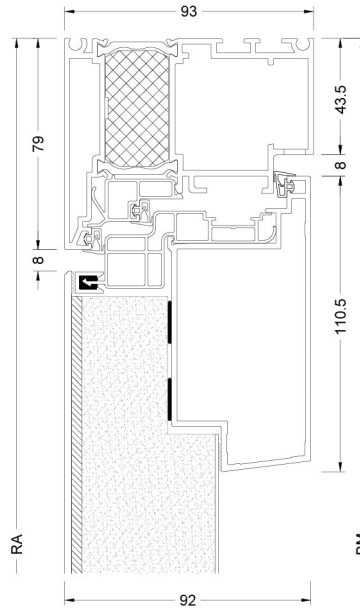

BM	Bestellmaß / Ordering size
FOK	Fußbodenoberkante / Finished floor level
GM	Glasmaß / Glass size
RA	Rahmenaußenmaß / Outside frame size
TM	Teilungsmaß / Division size